

# BK1120 | EtherCAT Bus Coupler for standard Bus Terminals

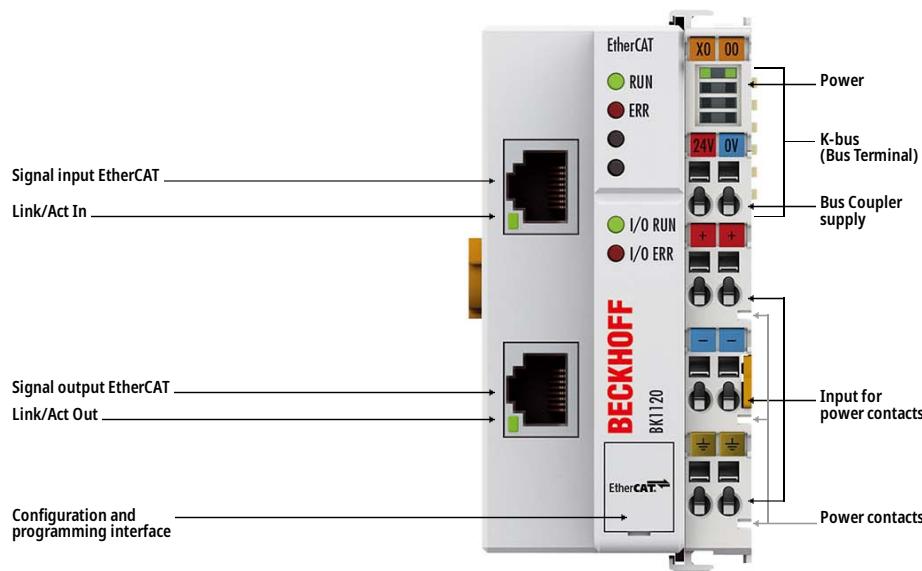



Image similar, may contain optional accessories

## Product status: regular delivery

The BK1120 EtherCAT Coupler is the link between the EtherCAT protocol at fieldbus level and the Bus Terminals. The coupler converts the passing telegrams from Ethernet 100BASE-TX to the internal, fieldbus-independent terminal bus. A station consists of a coupler and up to 64 Bus Terminals plus a bus end terminal. The process image of the EtherCAT system is assigned automatically. Up to 255 Bus Terminals can be connected via the K-Bus extension.

Special features:

- Connection technology: 2 x RJ45 socket
- Connection lengths: up to 100 m
- connects the EtherCAT protocol with the Bus Terminals

The BK1120 has two RJ45 sockets. The upper Ethernet interface is used to connect the coupler to the network; the lower socket serves for the optional connection of further EtherCAT devices in the same segment.

The system and field supply, each 24 V DC, is provided directly at the coupler. The attached Bus Terminals are supplied with the current required for communication from the supplied system voltage. The field supply is forwarded to the individual I/O components via the power contacts with up to 10 A. In the EtherCAT network, the BK1120 coupler can be installed anywhere in the Ethernet signal transfer section (100BASE-TX) – except directly at the switch. The EK9000 and EK1000 couplers are suitable for use at the switch.

## Product information

## Technical data

Technical data	BK1120
<b>Number of Bus Terminals</b>	64 (255 with K-bus extension)
<b>Max. number of bytes fieldbus</b>	1024 byte input and 1024 byte output
<b>Configuration</b>	via KS2000 or EtherCAT (ADS)
<b>Data transfer rates</b>	100 Mbit/s
<b>Bus interface</b>	2 x RJ45
<b>Data transfer medium</b>	Ethernet/EtherCAT Cat.5 cable
<b>Power supply</b>	24 V DC (-15%/+20%)
<b>Input current</b>	70 mA + (total K-bus current)/4, 500 mA max.
<b>Starting current</b>	approx. 2.5 x continuous current
<b>Recommended fuse</b>	≤ 10 A
<b>Current supply K-bus</b>	1750 mA
<b>Power contacts</b>	max. 24 V DC/max. 10 A
<b>Electrical isolation</b>	500 V (power contact/supply voltage/Ethernet)
<b>Distance between stations</b>	100 m (100BASE-TX)
<b>Data transfer time</b>	0.01 ms in the case of 10 modules for 32 bit inputs and outputs each (without K-bus runtime)
<b>Weight</b>	approx. 150 g
<b>Operating temperature</b>	-25...+60°C
<b>Storage temperature</b>	-40...+85°C
<b>Relative humidity</b>	95%, no condensation
<b>Vibration/shock resistance</b>	conforms to EN 60068-2-6/EN 60068-2-27
<b>EMC immunity/emission</b>	conforms to EN 61000-6-2/EN 61000-6-4
<b>Protect. rating/installation pos.</b>	IP20/variable
<b>Approvals/markings</b>	CE, CCC, UL, ATEX, IECEx
<b>Ex marking</b>	ATEX: II 3 G Ex ec IIC T4 Gc IECEx: Ex ec IIC T4 Gc

Housing data	BKxxxx, BCxxxx
<b>Design form</b>	compact terminal housing with signal LEDs
<b>Material</b>	polycarbonate
<b>Installation</b>	on 35 mm DIN rail, conforming to EN 60715 with lock
<b>Side by side mounting by means of</b>	double slot and key connection
<b>Marking</b>	labeling of the BZxxxx series

<b>Wiring</b>	solid conductor (s), flexible conductor (st) and ferrule (f): spring actuation by screwdriver
<b>Connection cross-section</b>	s*: 0.08...2.5 mm <sup>2</sup> , st*: 0.08...2.5 mm <sup>2</sup> , f*: 0.14...1.5 mm <sup>2</sup>
<b>Stripping length</b>	8...9 mm
<b>Current load power contacts</b>	I <sub>max</sub> : 10 A
<b>Dimensions (W x H x D)</b>	51 mm x 100 mm x 69 mm

\*s: solid wire; st: stranded wire; f: with ferrule