

Product data sheet

Specifications



analog input module Modicon Quantum - 8 I multirange

140ACI03000

⚠ Discontinued on: Jan 15, 2023

⚠ To be end-of-service on: Dec 31, 2030

⚠ Discontinued - Service only

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range of Product	Modicon Quantum automation platform
Product or Component Type	Analogue input module
Type of filter	Single pole low pass - 3 dB at 15 Hz +/- 20 %

Complementary

Analogue input number	8
Input type	Differential
Addressing requirement	9 input words
Analogue input resolution	12 bits
Linear measuring range	1...5 V 4...20 mA
Absolute maximum input	50 V DC 25 mA
Input impedance	250 Ohm current +/- 0.01 % > 20 MOhm voltage
Absolute accuracy error	+/- 0.05 % of full scale +/- 0.1 % of full scale maximum
Linearity error	+/- 0.04 %
Accuracy drift according to temperature	+/- 0.0025 % of full scale/°C <= 0.005 % of full scale/°C
Common mode rejection	> - 72 dB 60 Hz
Isolation between channels and bus	1000 V DC 3000 V DC 60 s
Isolation between channels	30 V DC
Update time	5 ms
Fault type	Broken wire 4...20 mA Undervoltage range 1...5 V
Marking	CE
Local signalling	1 LED (green) for bus communication is present (Active) 1 LED (red) for external fault 8 LEDs (green) for channel is turned on 8 LEDs (red) for channel fault
Bus current requirement	240 mA
Power dissipation in W	2 W
Module format	Standard

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Net Weight	0.7 lb(US) (0.3 kg)
------------	---------------------

Environment

Standards	UL 508 CSA C22.2 No 142
-----------	----------------------------

Product Certifications	FM Class 1 Division 2 cUL
------------------------	------------------------------

Resistance to electrostatic discharge	4 kV contact IEC 801-2 8 kV on air IEC 801-2
---------------------------------------	---

Resistance to electromagnetic fields	9.1 V/m (10 V/m) 80...1000 MHz IEC 801-3
--------------------------------------	--

Ambient Air Temperature for Operation	32...140 °F (0...60 °C)
---------------------------------------	-------------------------

Ambient Air Temperature for Storage	-40...185 °F (-40...85 °C)
-------------------------------------	----------------------------

Relative Humidity	95 % without condensation
-------------------	---------------------------

Operating altitude	<= 16404.2 ft (5000 m)
--------------------	------------------------

Ordering and shipping details

Category	US1PC2118155
----------	--------------

Discount Schedule	PC21
-------------------	------

GTIN	3595861126565
------	---------------

Returnability	Yes
---------------	-----

Packing Units

Unit Type of Package 1	PCE
------------------------	-----

Nbr. of units in pkg.	1
-----------------------	---

Package 1 Height	1.9 in (4.8 cm)
------------------	-----------------

Package 1 Width	6.5 in (16.5 cm)
-----------------	------------------

Package 1 Length	12.2 in (31.0 cm)
------------------	-------------------

Package weight(Lbs)	15.9 oz (450.0 g)
---------------------	-------------------

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better



Materials and Substances

[EU RoHS Directive](#)

Pro-active compliance (Product out of EU RoHS legal scope)

California proposition 65

WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer



Lifetime extension


Repair

No

Dimensions Drawings

Racks for Modules Mounting

Dimensions of Modules and Racks

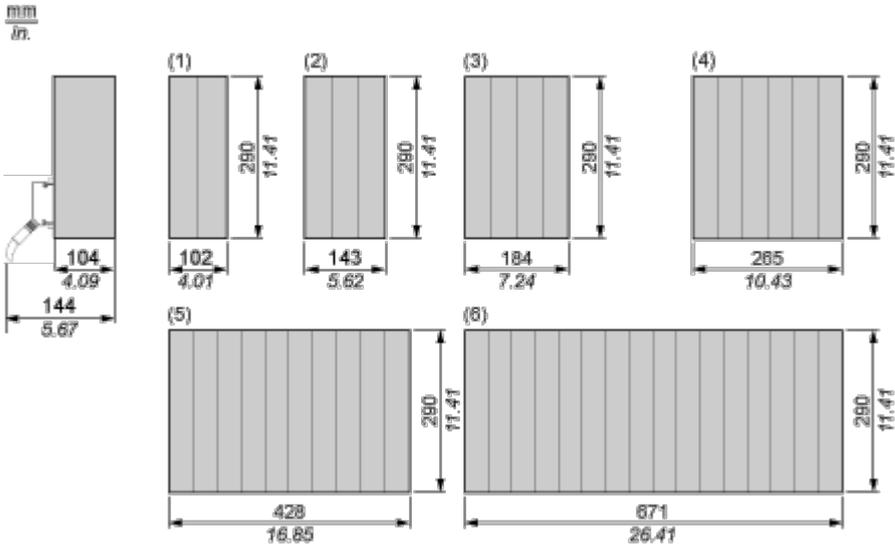


- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

Connections and Schema

Analog Input 8-Channel Unipolar Module

Wiring Diagram

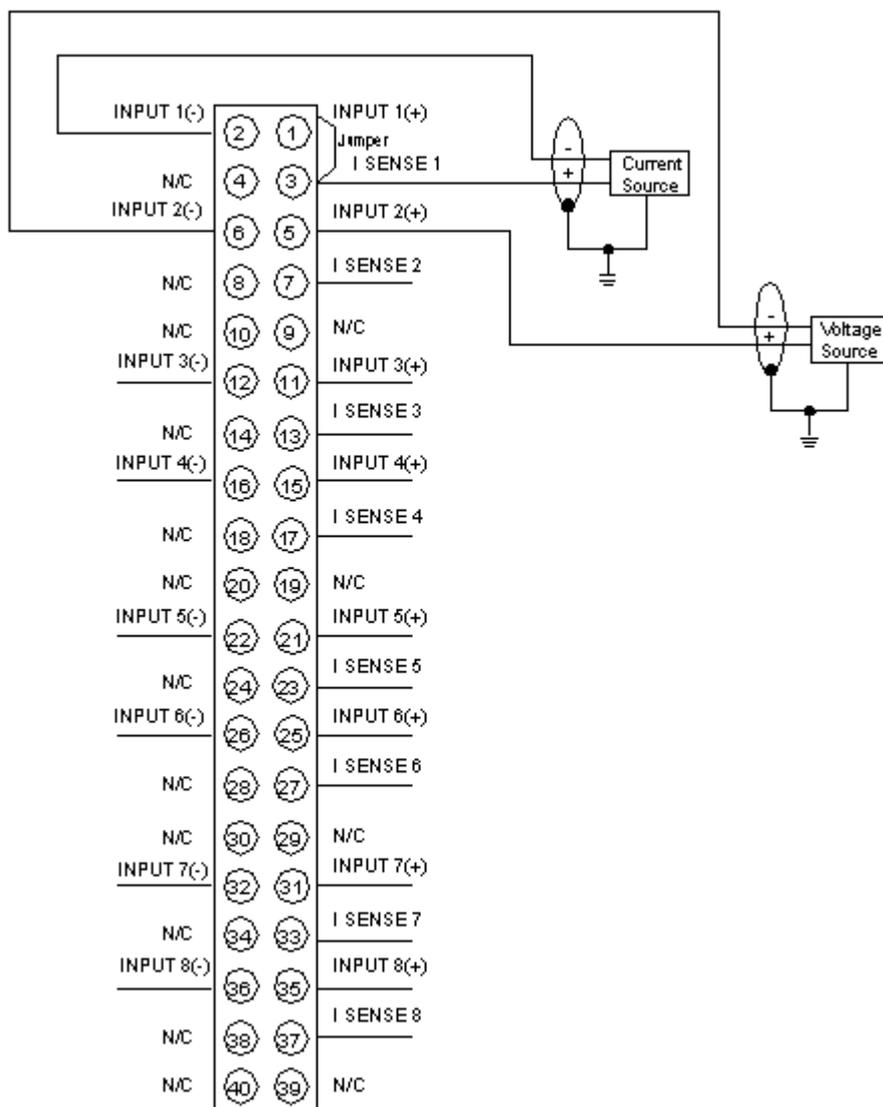

N/C Not Connected

The maximum channel to channel working voltage cannot exceed 30 Vdc.